


# Kooltherm® K10 Soffit Board

INSULATION FOR STRUCTURAL CEILINGS (SOFFITS)



- Premium performance rigid thermoset insulation – thermal conductivities as low as 0,021 W/m·K
- Unaffected by air infiltration
- Resistant to the passage of water vapour
- Easy to handle and install
- Ideal for new build and refurbishment
- Non-deleterious material
- Manufactured with a blowing agent that has zero ODP and low GWP

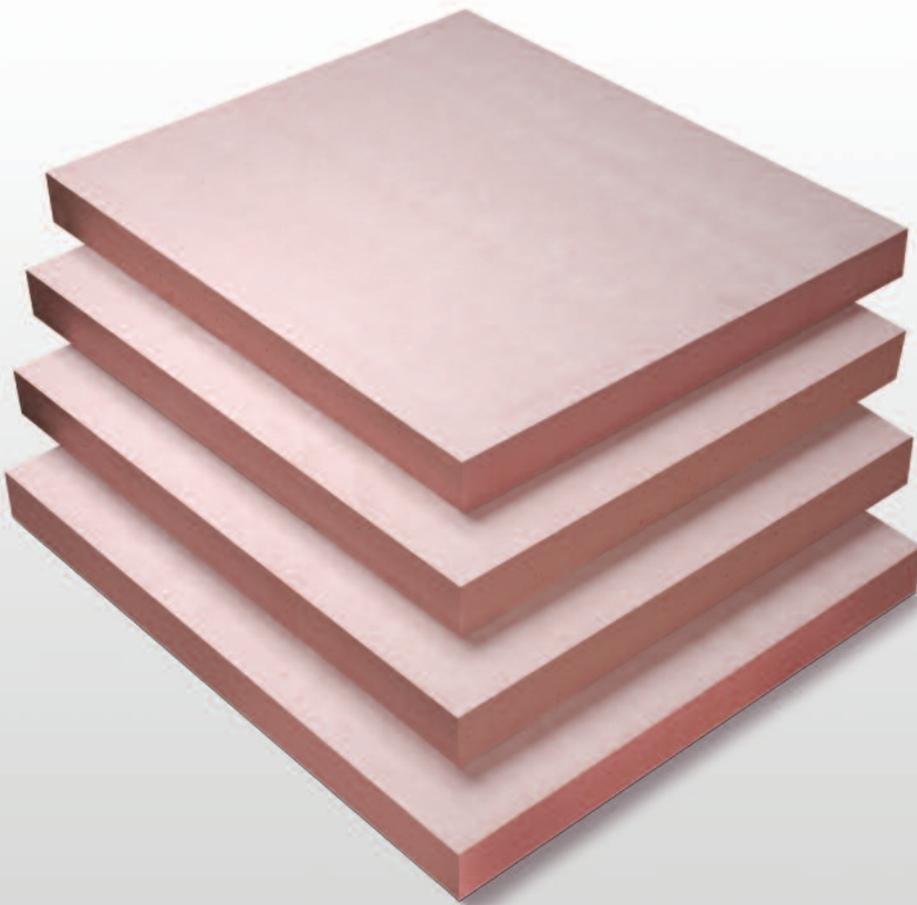

*Low Energy –  
Low Carbon Buildings*

# Kooltherm® K10 Soffit Board

## Description

Kingspan **Kooltherm**® K10 Soffit Board comprises a premium performance rigid thermoset modified resin insulation core, faced on both sides with a glass tissue based facing, autohesively bonded to the insulation core during manufacture.

## General

### Resistance to Solvents, Fungi & Rodents

The insulation core is resistant to short-term contact with petrol and with most dilute acids, alkalis and mineral oils. However, it is recommended that any spills be cleaned off fully before the boards are installed. Ensure that safe methods of cleaning are used, as recommended by suppliers of the spilt liquid. The insulation core is not resistant to some solvent-based adhesive systems, particularly those containing methyl ethyl ketone. Adhesives containing such solvents should not be used in association with this product. Damaged boards or boards that have been in contact with harsh solvents or acids should not be used.

### Cutting

Cutting should be carried out by using a fine toothed saw. Ensure accurate trimming to achieve close-butting joints and continuity of insulation.

### Packaging and Storage

The polyethylene packaging of Kingspan Insulation products, which is recyclable, should not be considered adequate for outdoor protection. Ideally, boards should be stored inside a building. If, however, outside storage cannot be avoided, then the boards should be stacked clear of the ground and covered with an opaque polythene sheet or weatherproof tarpaulin. Boards that have been allowed to get wet should not be used.

### Health and Safety

Kingspan Insulation products are chemically inert and safe to use. A Safety Information Data Sheet for this product is available from the Kingspan Insulation website.

*Warning – do not stand on or otherwise support your weight on this product unless it is fully supported by a load bearing surface.*

## Product Data

Property	Result
<b>General</b>	
Product Thickness	Refer to local distributor for current stock and non-stock sizes
Board Length (mm)	1200
Board Width (mm)	600
Compressive Strength (EN 826: 1996)	Typically exceeds 100 kPa @ 10% compression
Dimensional Stability (EN 1604: 2007) 48 Hours	≤ 1,5% (70°C & 90% RH – length & breadth) ≤ 1,5% (70°C – length & breadth) ≤ 3,0% (70°C – thickness)
Diffusion Resistance Factor	35 μ
<b>Thermal</b>	
Thermal Conductivity (EN 13166: 2008)	0,022 W/m·K (thickness 20–44 mm) 0,021 W/m·K (thickness ≥ 45 mm)
<b>Fire &amp; Smoke</b>	
Reaction to Fire (EN 13501-1: 2007)	C <sub>s2d0</sub> (when tested 'as placed on the market')

## Standards & Approvals

Kingspan **Kooltherm**® K10 Soffit Board is manufactured to the highest standards under a management system certified to NEN EN ISO 9001: 2008 (Kwaliteitsmanagementsystemen - Eisen).



### Kingspan Insulation B.V.

Lorentzstraat 1, 7102 JH, Winterswijk, Netherlands  
Tel: +31 (0) 543 543 210 Fax: +31 (0) 344 675 215  
email: info@kingspaninsulation.eu

### Technical Advice

Tel: 00800 – Kingspan (00800 – 54647726)  
Fax: +31 (0) 344 675 215  
email: technical@kingspaninsulation.eu

[www.kingspaninsulation.eu](http://www.kingspaninsulation.eu)